

Pre-Remanufacture

5 MVA 69000 x 34500 – 7200/12470Y x 2400/4160Y
GE Mobile manufactured in 1956 with layer windings



5000 KVA FOA @ 55° C. rise



Layer Windings




During Disassembly

Post Redesign & Remanufacture

7.5 MVA 69000 x 34500 – 7200/12470Y x 2400/4160Y
50% KVA Upgrade, New Core, Nomex Insulation, Disc Windings



New Core and Top & Bottom Frame

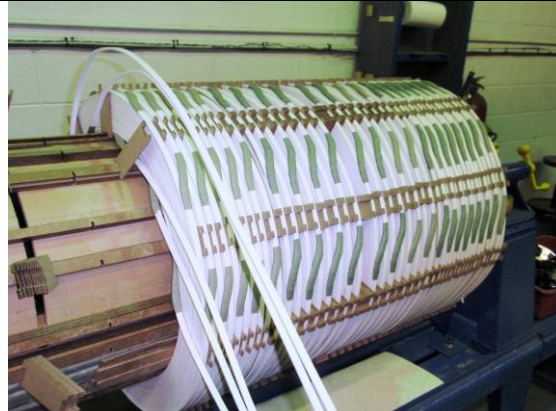

New Nomex Disc Windings



All New Core & Coil Assembly



Sandblasted and Painted



Underside of Trailer



New bushings, arresters & gauges



DOT Inspected, New Drawings Package